



**6D Demolition Plan**  
1/4" = 1'-0"

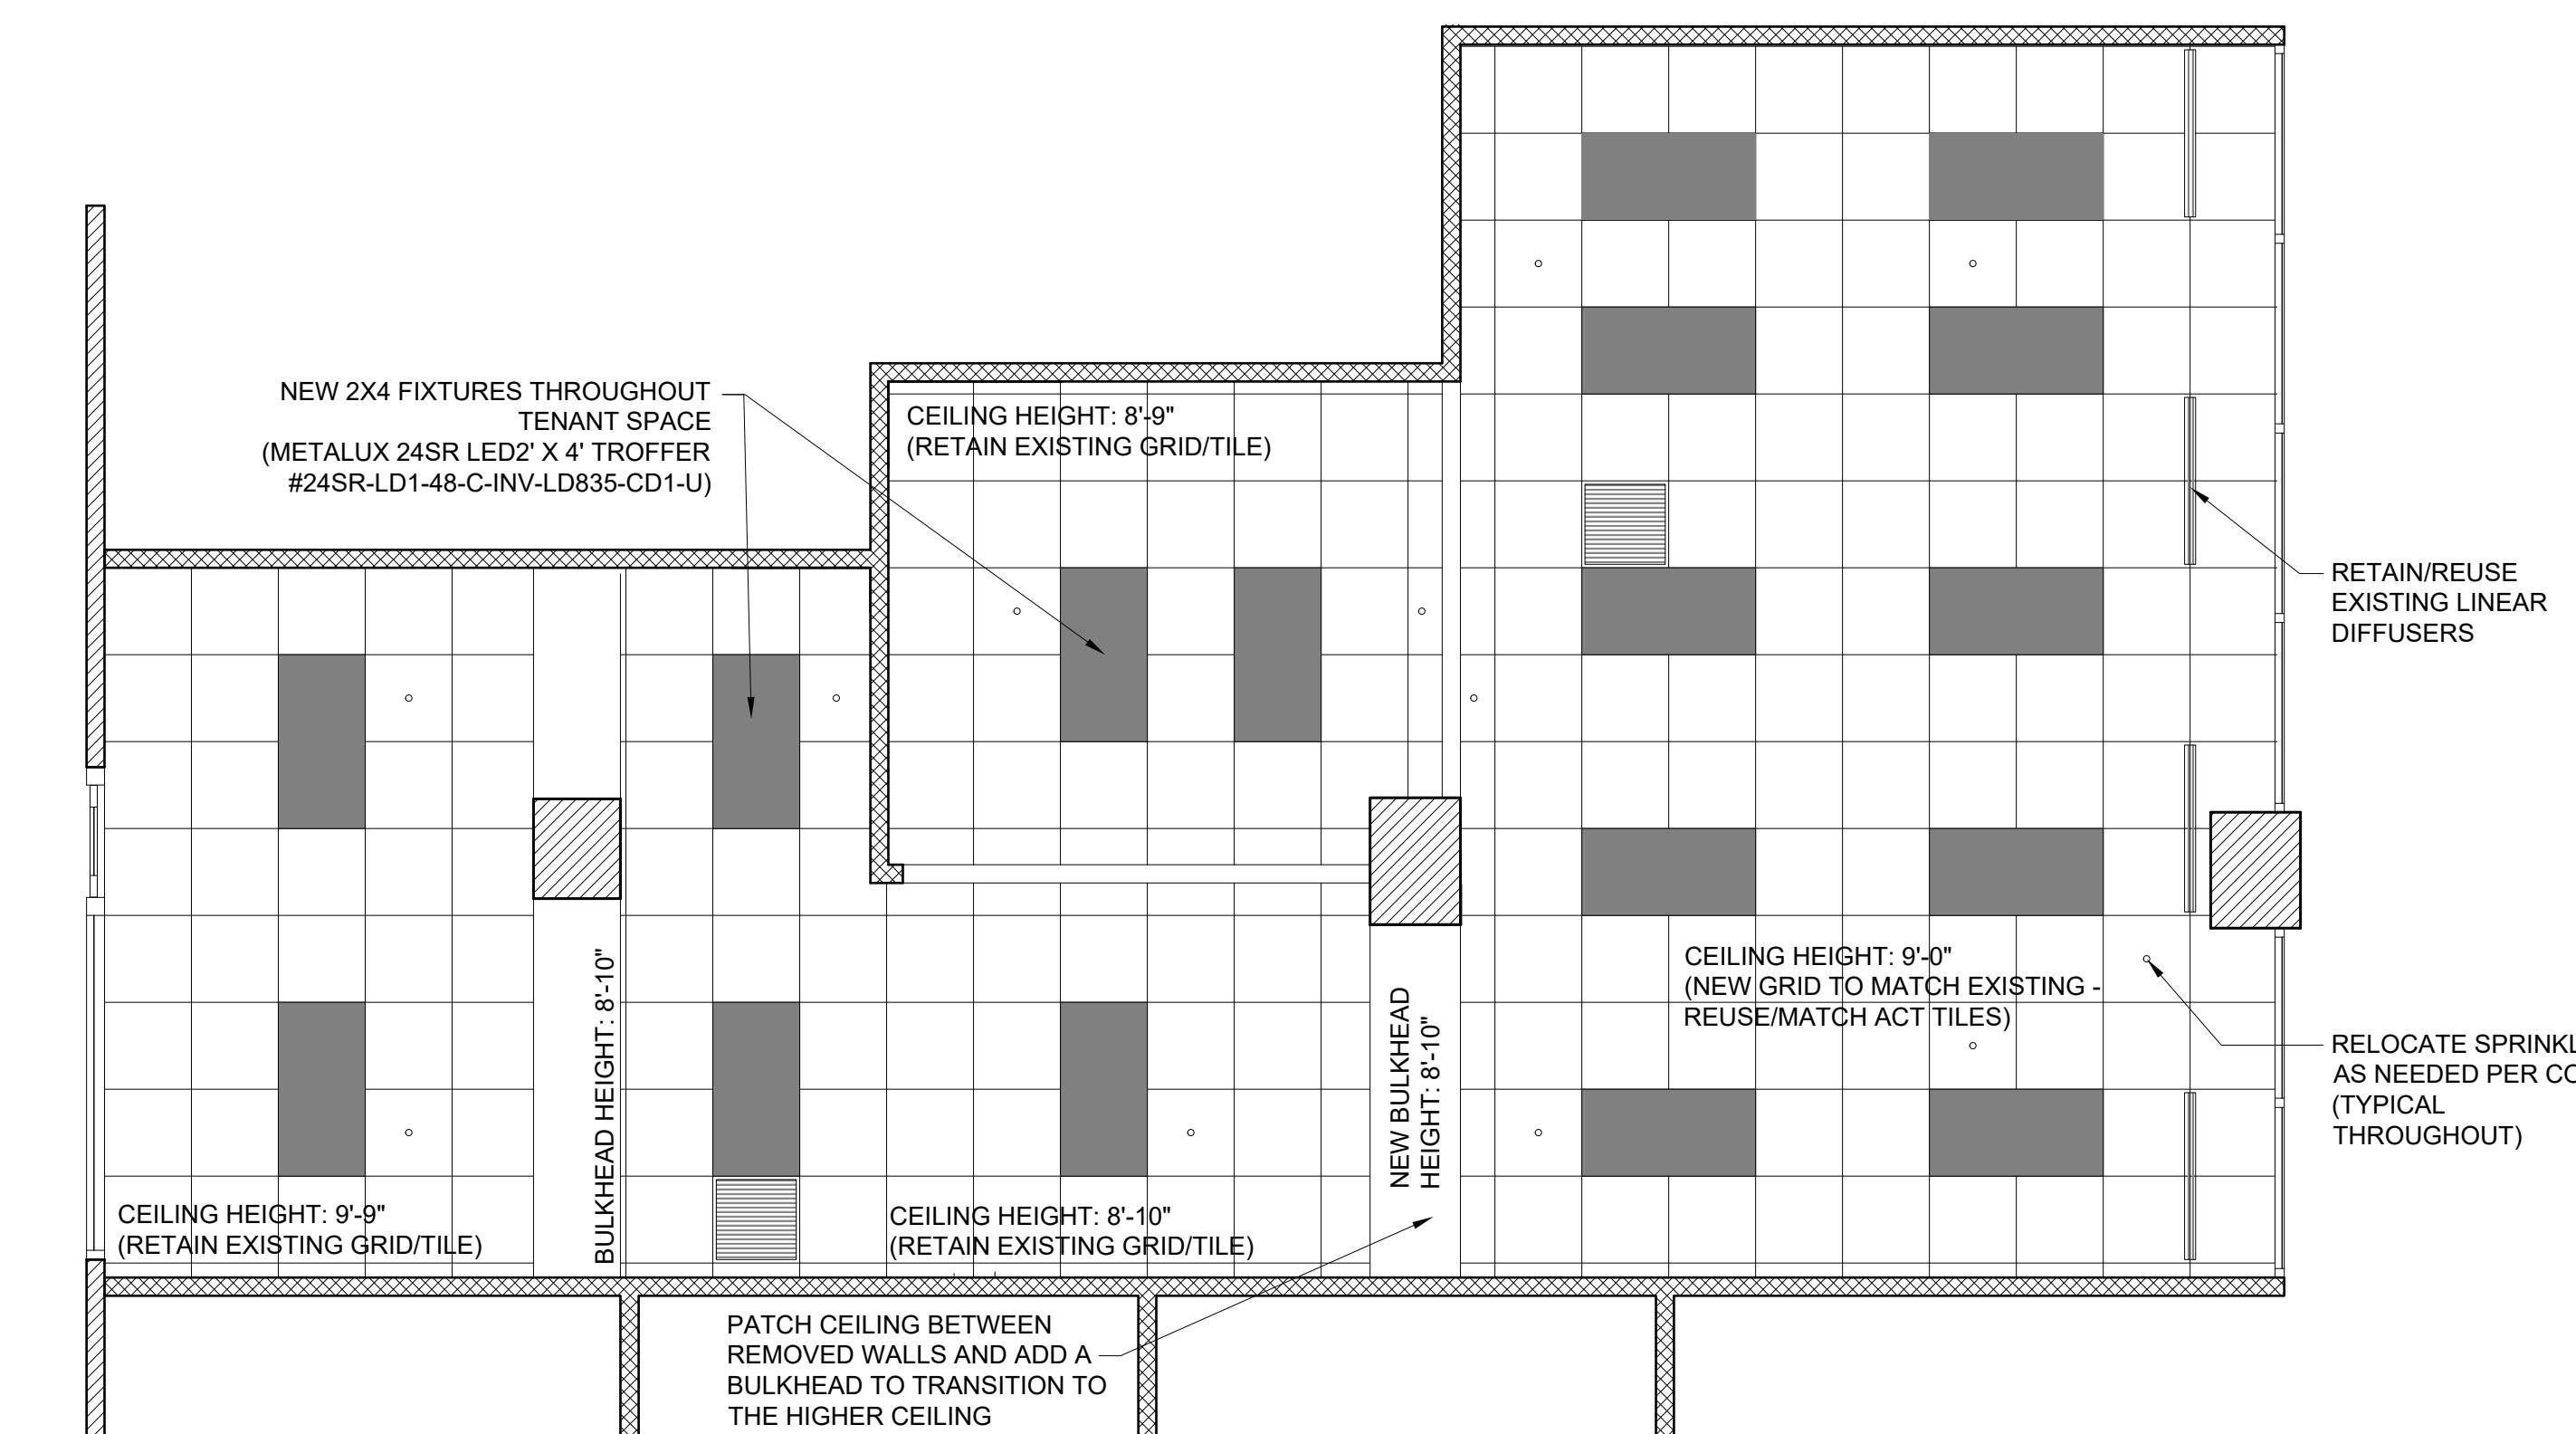

**(6B) Reflected Ceiling Plan**

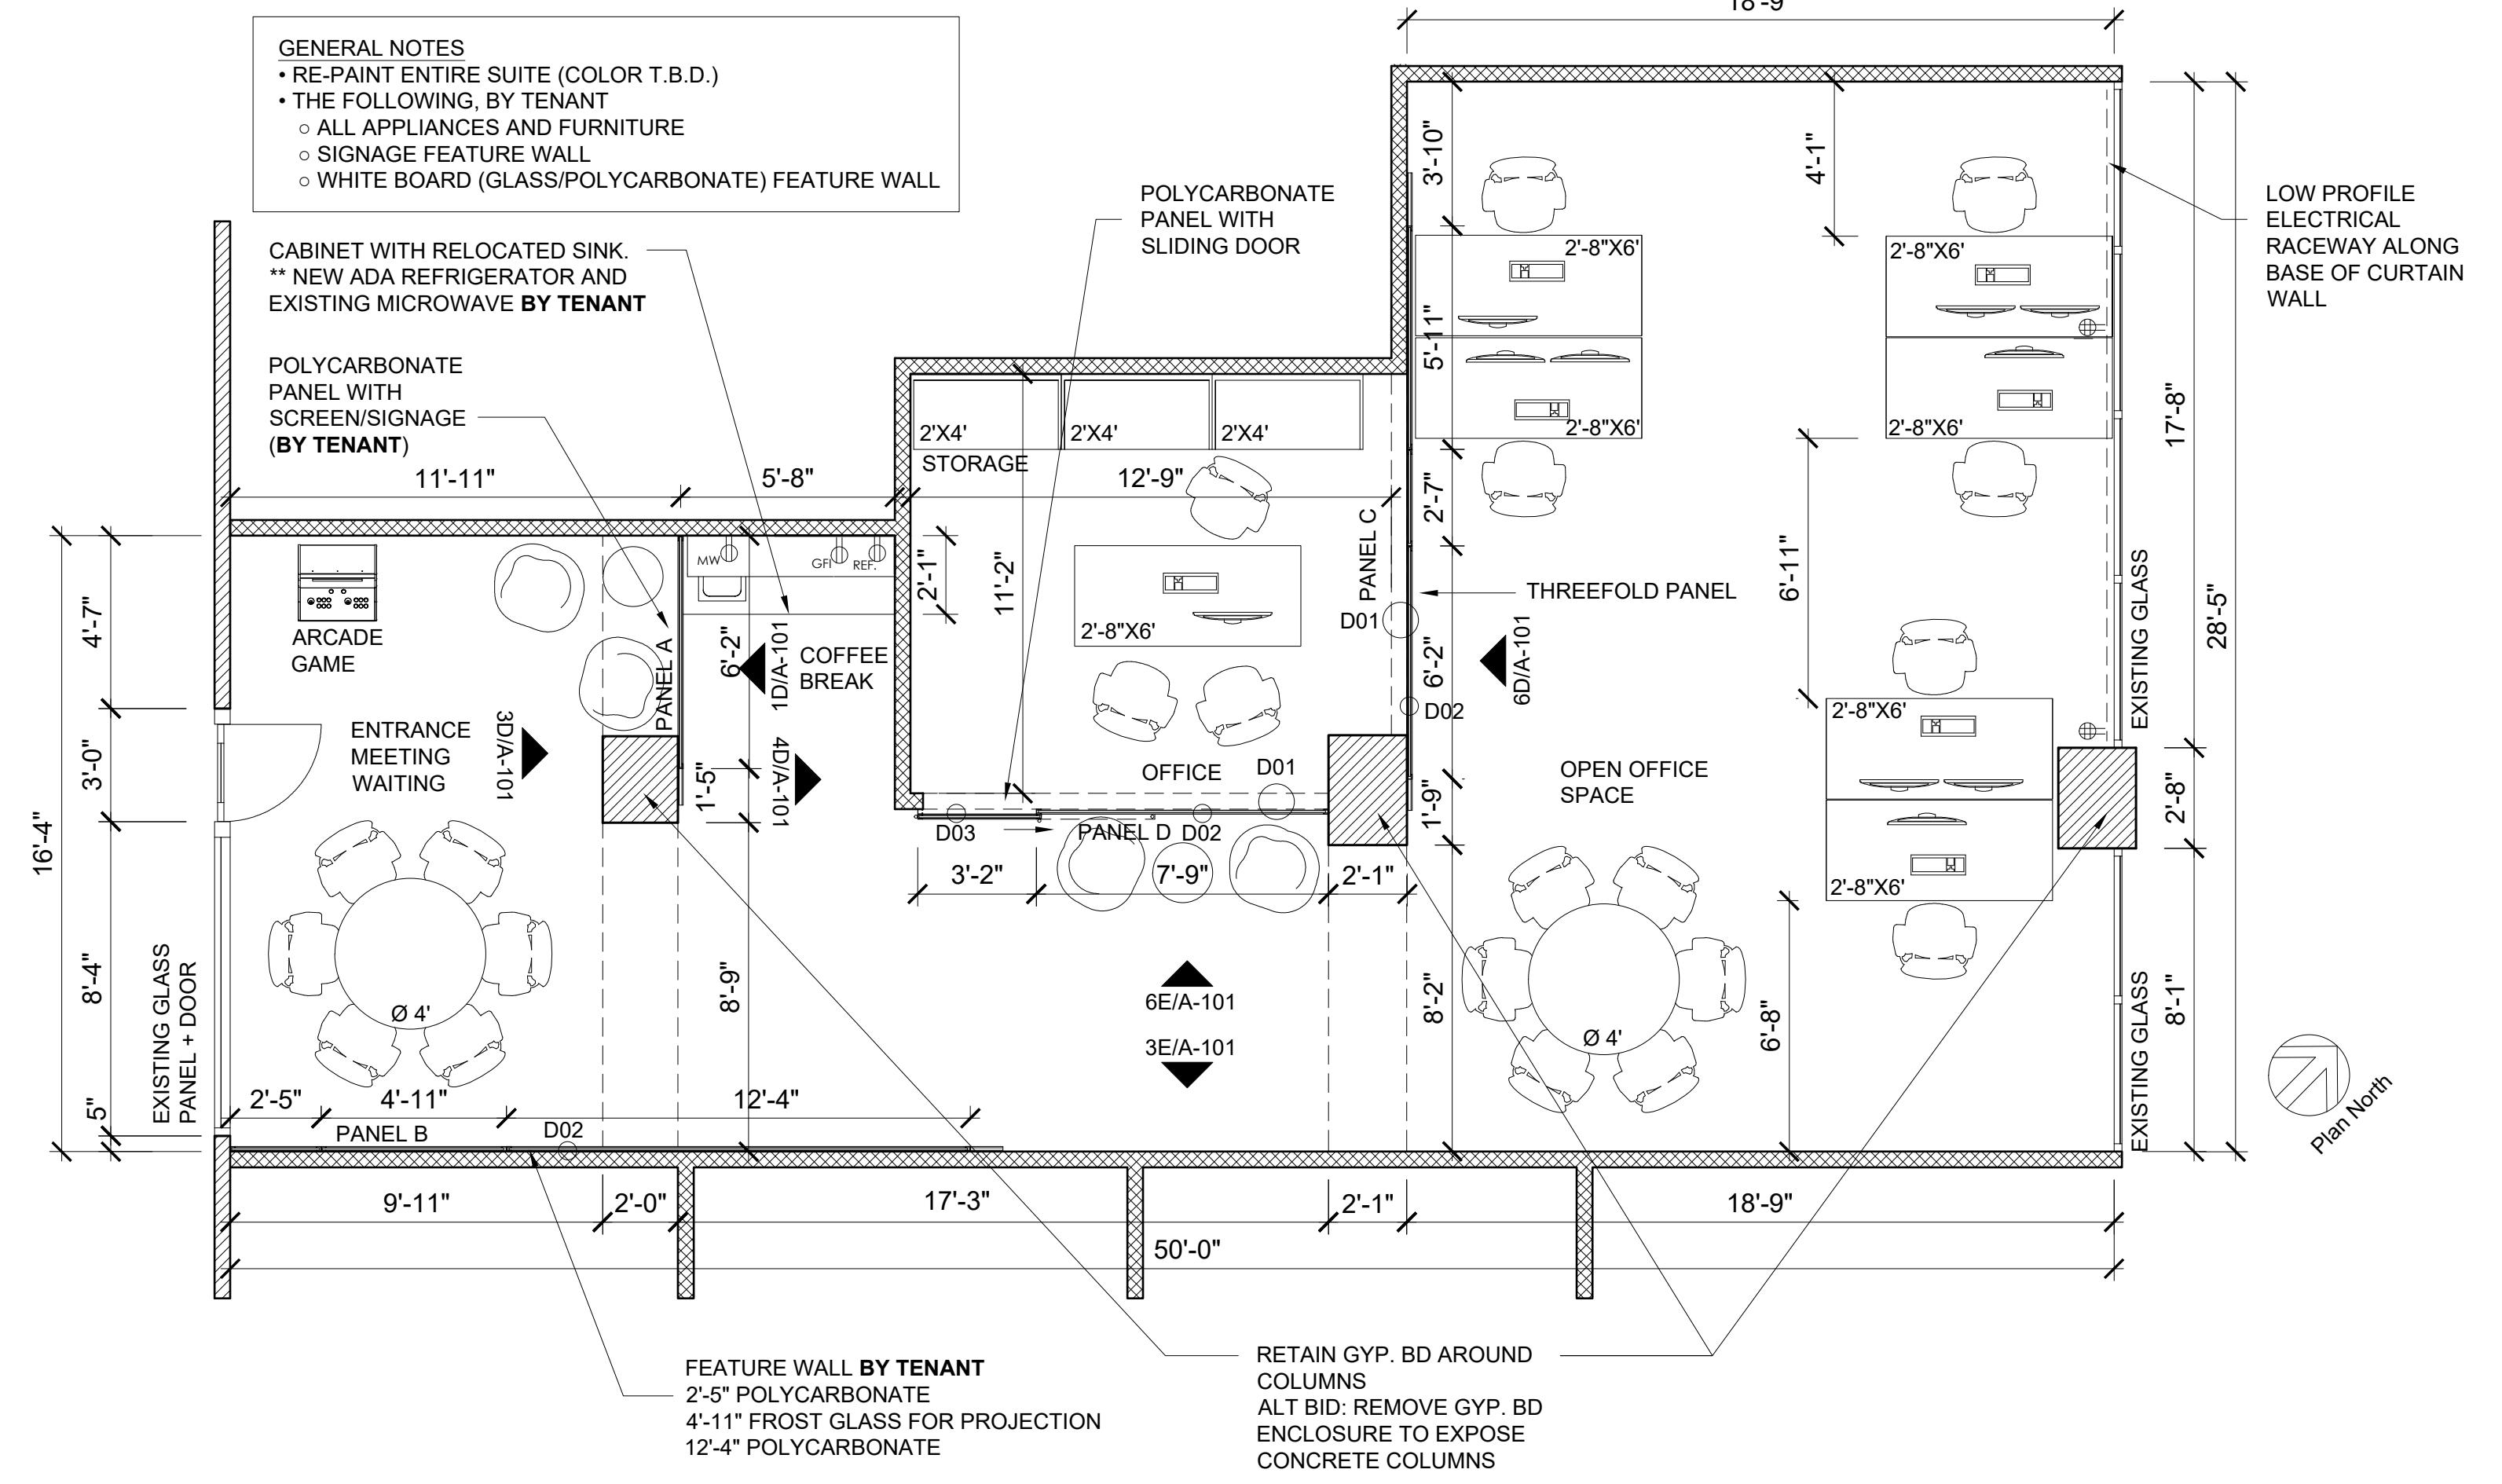

4D Floor Plan  
1/4" = 1'-0"



10 E Doty St #300 | Madison, WI 53703 | 608-251-0706



**NOBLE**  
APPLICATIONS



Lakeside St. | Madison, WI 53715 | 773-425-6414

44 E. Mifflin St.  
Suite 802






# Floor Plans

A-100

Scale As indicated

NOBLE  
APPLICATIONS


UNCREATED.NET

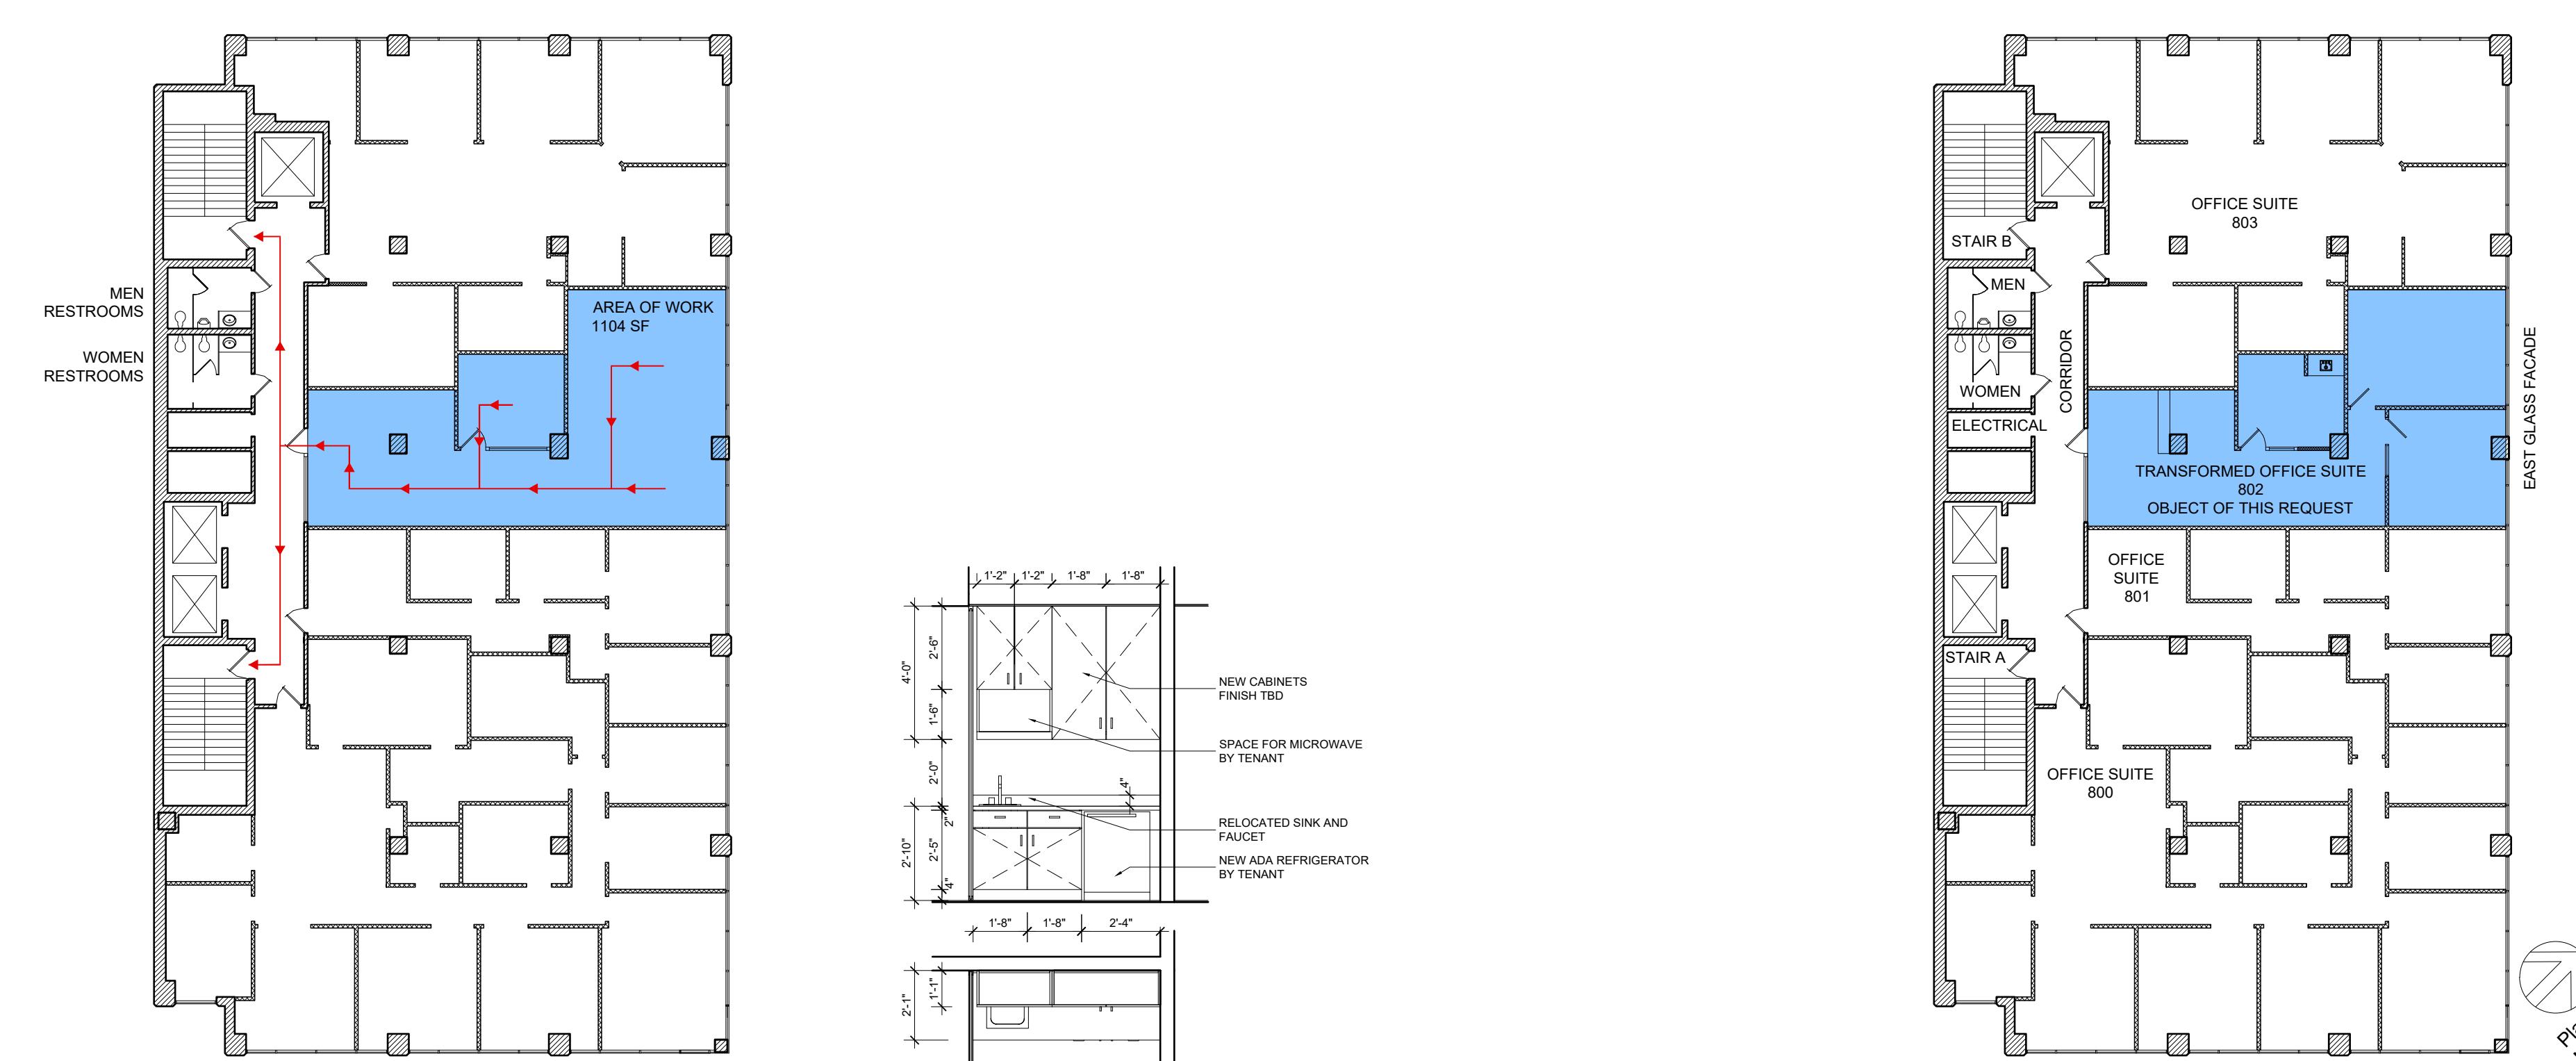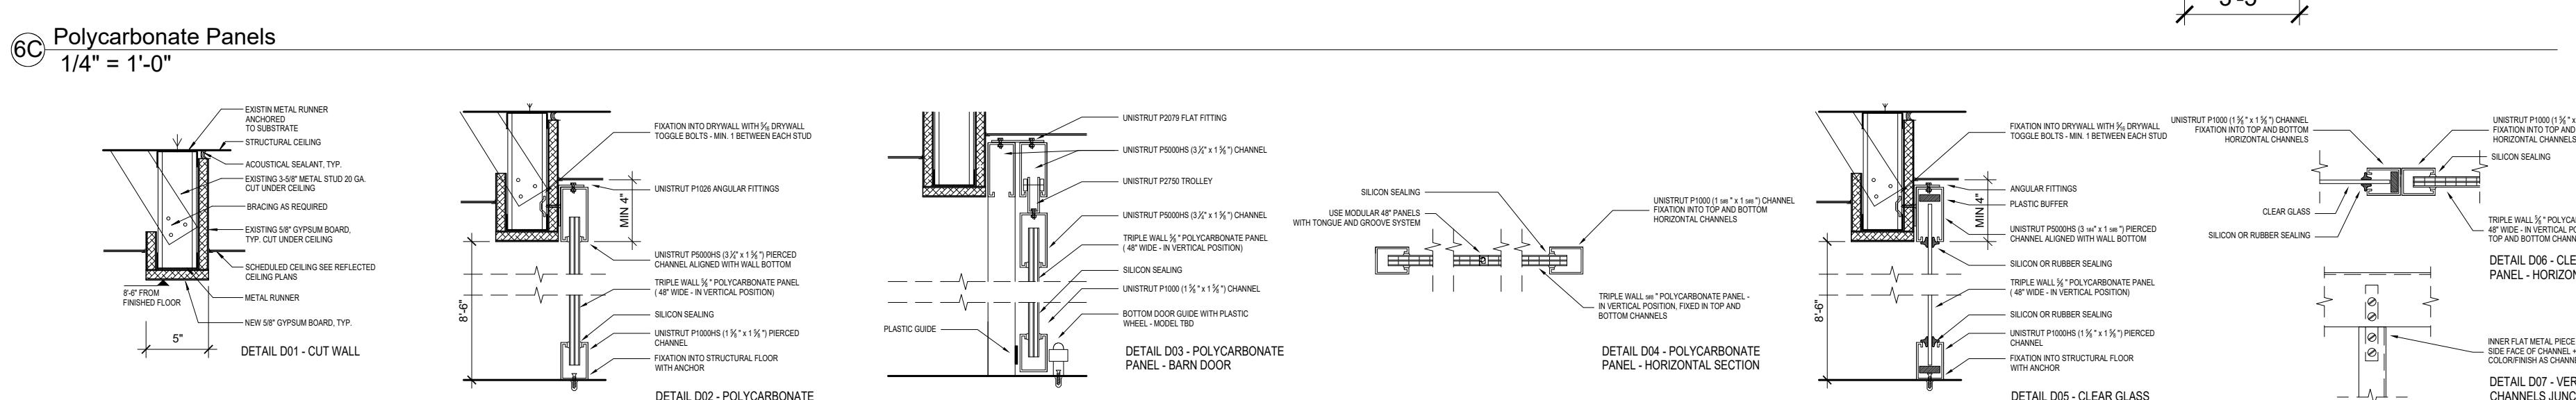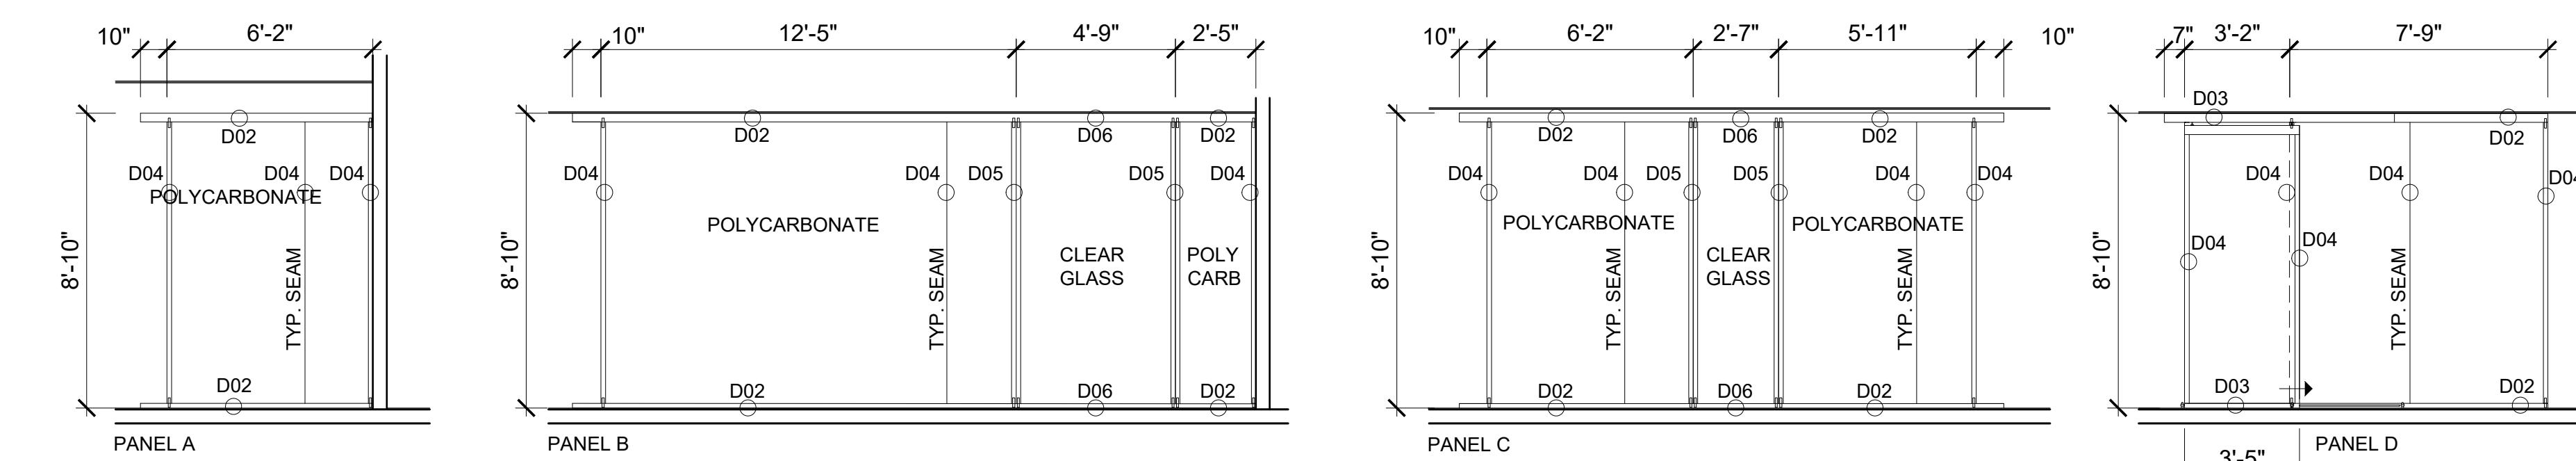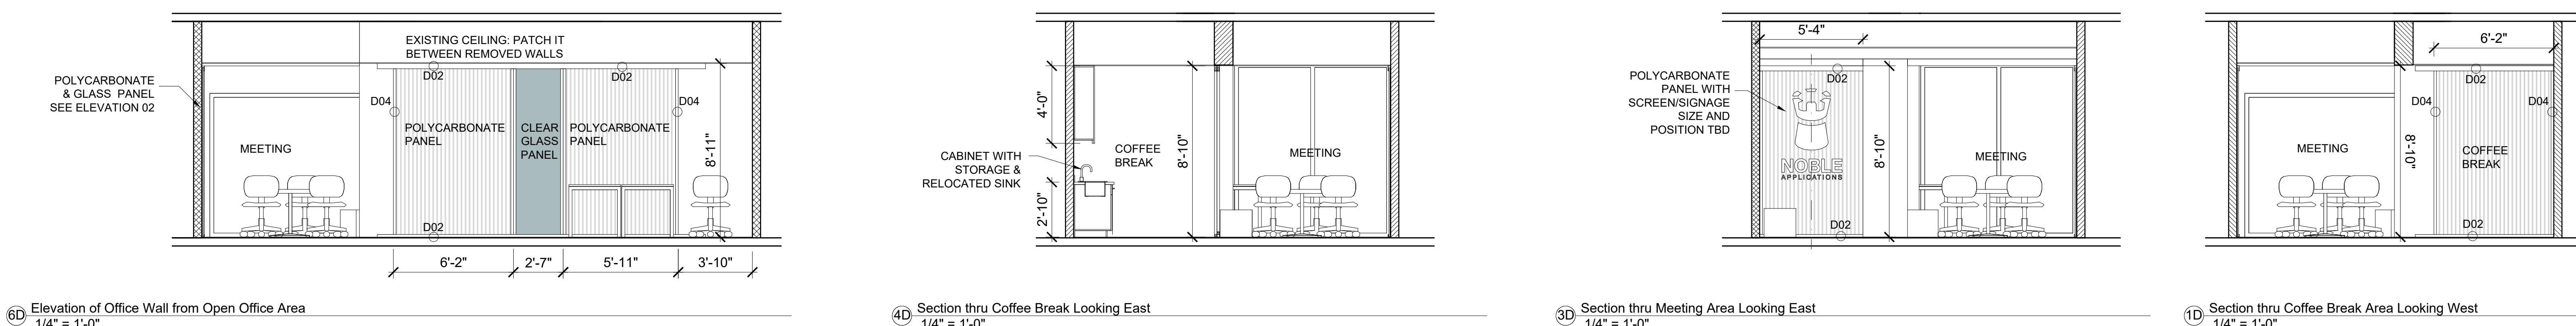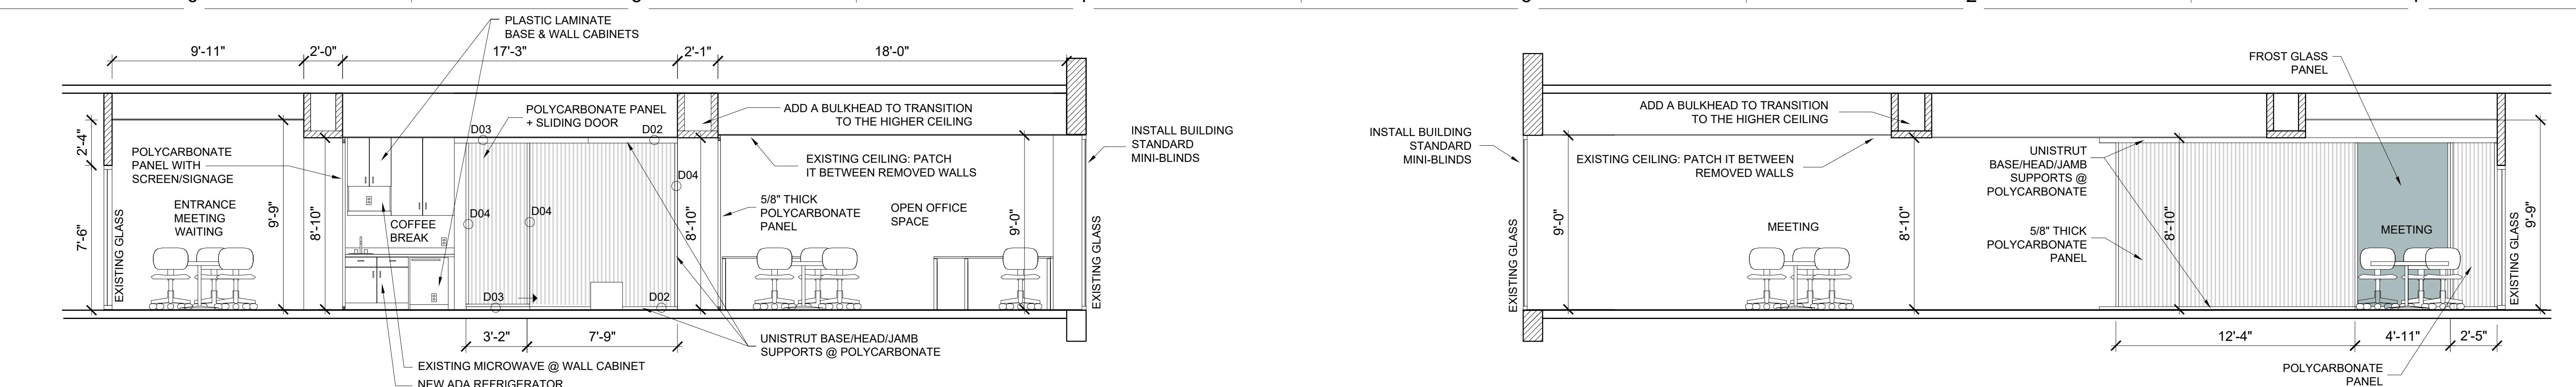

FINISH ROOM SCHEDULE					
ROOM	AREA	FLOOR	BASE	WALLS	CEILING
ENTRANCE / MEETING / WAITING	189.4 SQF		VINYL TILES - PATCRAFT LETTERPRESS LVT	VINYL BASE	PAINT TBD
COFFEE BREAK	41.7 SQF		VINYL TILES - PATCRAFT LETTERPRESS LVT	VINYL BASE	PAINT TBD
OFFICE	147.7 SQF		VINYL TILES - PATCRAFT LETTERPRESS LVT	VINYL BASE	PAINT TBD
OPEN OFFICE SPACE	701.7 SQF		VINYL TILES - PATCRAFT LETTERPRESS LVT	VINYL BASE	PAINT TBD
					EXISTING 24"x48" CEILINGTILES

LOCATION	OPENING WIDTH	OPENING HEIGHT	TYPE
OFFICE / OPEN OFFICE SPACE	3'-2"	8'-6"	SLIDING DOOR - METAL FRAME WITH POLYCARBONATE PANEL - SEE DETAIL

LOCATION	QUANTITY	TYPE
ENTRANCE / MEETING / WAITING	2	NEW 2X4 FIXTURES (METALUX 24SR LED2' X 4' TROFFER #24SR-LD1-48-C-INV-LD835-CD1-U)
COFFEE BREAK	1	NEW 2X4 FIXTURES (METALUX 24SR LED2' X 4' TROFFER #24SR-LD1-48-C-INV-LD835-CD1-U)
OFFICE	2	NEW 2X4 FIXTURES (METALUX 24SR LED2' X 4' TROFFER #24SR-LD1-48-C-INV-LD835-CD1-U)
OPEN OFFICE SPACE	12	NEW 2X4 FIXTURES (METALUX 24SR LED2' X 4' TROFFER #24SR-LD1-48-C-INV-LD835-CD1-U)

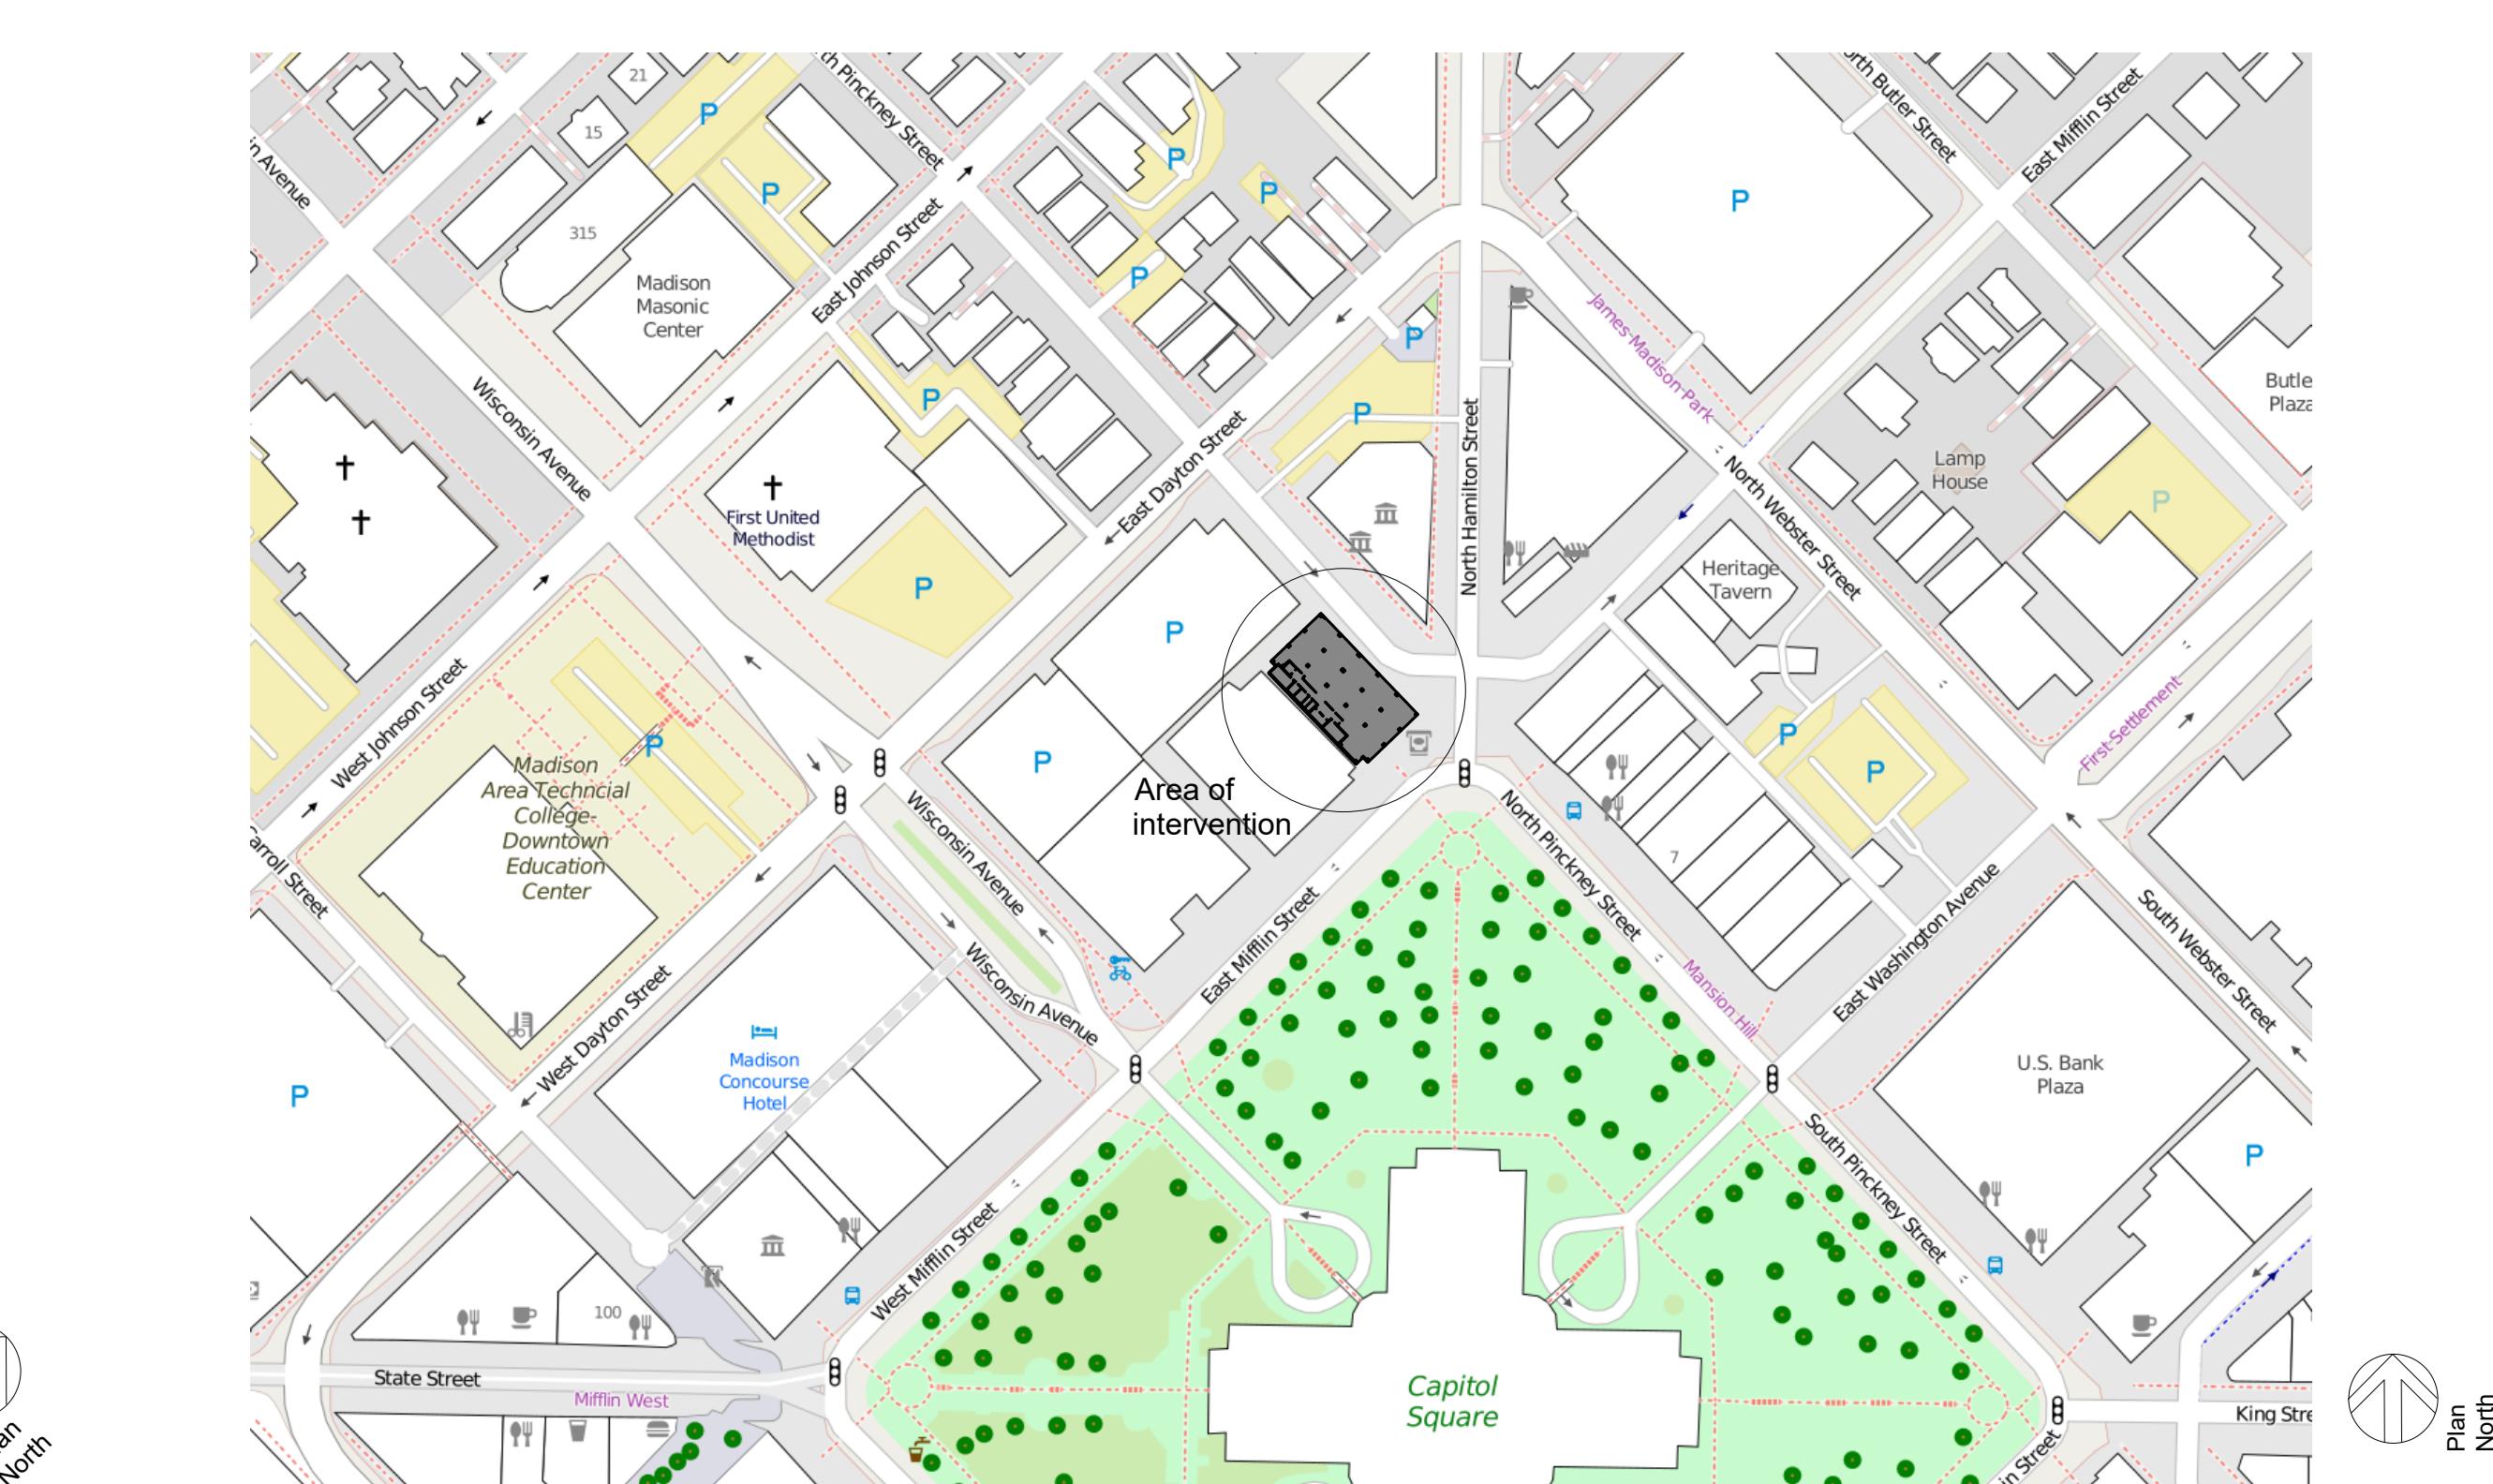44 E. Mifflin St.  
Suite 802Elevations &  
Schedules

A-101

As indicated

Scale